

Stone burier

ROTOSTONE RSH-M



For tractors
from 30 to 80 Hp



Max working depth
max 22 cm



Working width
from 85 to 185 cm

FUNCTIONALITY AND USE


The RSH-M stone burier is designed for green area professionals who need to work both on the surface and in depth. With this machine, it is possible to refine clods, bury stones up to 20 cm in diameter, and remove residues from previous operations. The wide intake mouth and the special frame geometry allow operation with low-power tractors, making this machine ideal for environmental restoration sites and green space main-

tenance. The selection grill with independent springs allows work even on moist soil, separating coarse material from finely processed soil: the stones are buried, and the refined soil covers the surface, creating an optimal seedbed. For greater efficiency, the RSH-M can be combined with a lawn seeder, allowing for soil preparation and seeding in a single pass, with uniform and high-quality results.



DETAILS THAT MAKE THE DIFFERENCE

The RSH-M model features a high clearance under the frame, promoting continuous material flow without clogging.

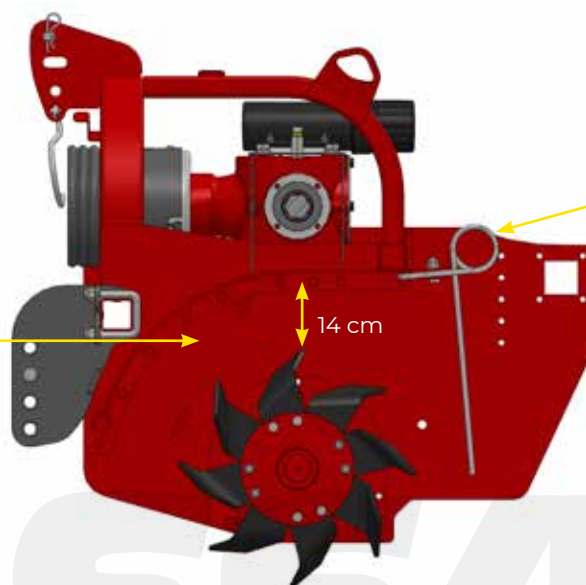

The selection grill with independent springs allows operation even on moist soil, separating coarse material from finely processed soil: the stones are buried, and the refined soil covers the surface, creating an optimal seedbed.

STANDARD EQUIPMENT:

- ▶ Attachment plate type Toro / Ditch Witch / Vermeer: STH36
- ▶ Single-sheet frame made of S 700 material
- ▶ Hydraulic motor complete with ½" hoses
- ▶ Single side transmission by chain ASA 80 HE
- ▶ Rotor bearing supports with double seals
- ▶ Rotor Ø 390 mm with S700 steel flanges
- ▶ Rotor speed: 220 rpm ▶ Rotostone blades "flat 80x8 mm"
- ▶ No. 4 Rotostone blades per flange
- ▶ Double flange kit
- ▶ Selection grill with independent springs
- ▶ Articulated levelling bar kit with crank adjustment
- ▶ Expanded metal roller kit Ø 290 mm with internal spiral
- ▶ Safety devices according to EU regulations

OPTIONAL EQUIPMENT

- ▶ Frangiter rotor
- ▶ Cardan drive shaft with automatic clutch
- ▶ Pair of side discs
- ▶ Expanded metal roller kit Ø 360 mm with internal spiral
- ▶ Smooth roller kit Ø 355 mm
- ▶ Packer roller kit Ø 420 mm

SPECIAL EQUIPMENT:

- ▶ Blades with wear-resistant coating
- ▶ Rollers on request
- ▶ Mechanical lawn seeder kit
- ▶ Pneumatic seeder kit (APV type)
- ▶ Tractor-side yoke options
- ▶ Custom colour

TECHNICAL SPECIFICATIONS

Model		RSH-M 85	RSH-M 105	RSH-M 125	RSH-M 145	RSH-M 165	RSH-M 185
Tractor power	min/max Hp	30-80	30-80	35-80	35-80	40-80	50-80
Stone burier working width	cm	85	105	125	145	165	185
Roller working width	cm	115	135	155	175	195	215
Overall transport width	cm	124	144	164	184	204	224
Rotostone flanges	Nr.	5	6	7	8	9	10
Total Rotostone blades (4x)	Nr.	20	24	28	32	36	40
Total Rotostone blades (6x)	Nr.	30	36	42	48	54	60
No. of Frangiter flanges	Nr.	7	8	9	10	11	12
Total Frangiter blades (6x)	Nr.	42	48	54	60	66	72
Base configuration weight	Kg	445	490	537	585	622	675

Base configuration: Rotostone 4-blade + Levelling bar + Expanded metal roller Ø 290 mm – Without side discs

*Side discs weight: 20 kg | The data refer to the machine without options. Weights and dimensions shown in the table are indicative and not binding.

