

Stone burier

ROTOSTONE RSH



For tractors
from 25 to 40 Hp



Maximum working depth:
max 19 cm




Working width:
from 90 to 150 cm

FUNCTIONALITY AND USE


The RSH is a stone burier ideal for gardens, vegetable plots, and small agricultural areas. Designed for low-power tractors, it is built with high-strength steel to ensure top performance while keeping weight low. Its wide intake opening, combined with an increased under-frame clearance compared to standard stone buriers, makes the RSH suitable for burying larger stones.

Thanks to its compact design, it is ideal for working in confined spaces such as greenhouses or fields with trees and shrubs, being capable of burying stones up to 15 cm in diameter. The combination of levelling bar and expanded metal roller ensures excellent levelling and a fine finish, meeting the needs of landscapers and professional operators.

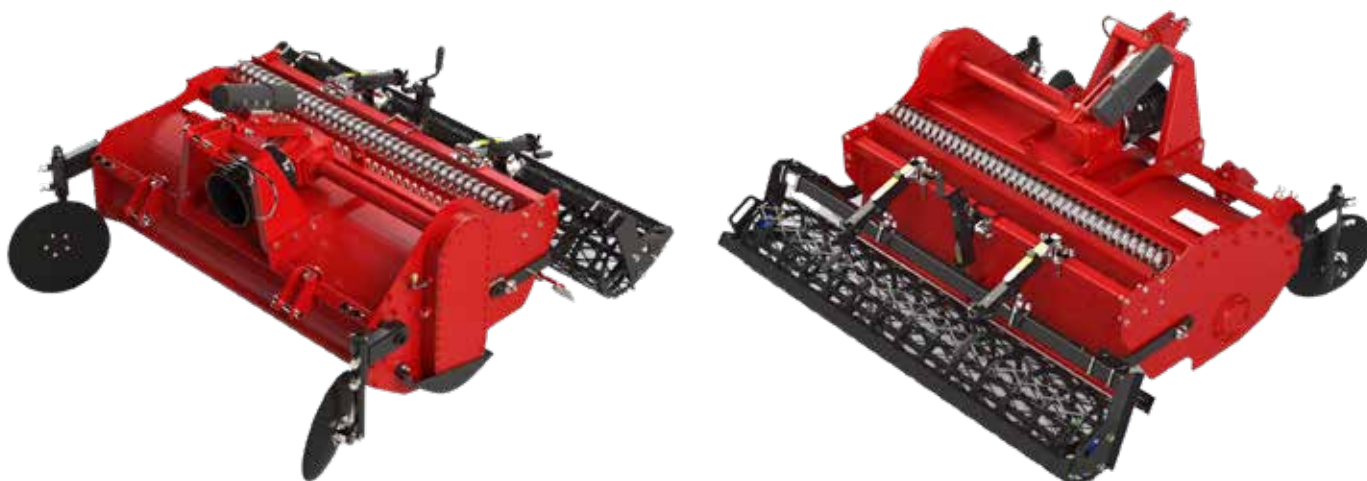

FEATURES THAT MAKE THE DIFFERENCE

This model is designed with a large under-frame clearance, ensuring a continuous material flow and reducing the risk of clogging.

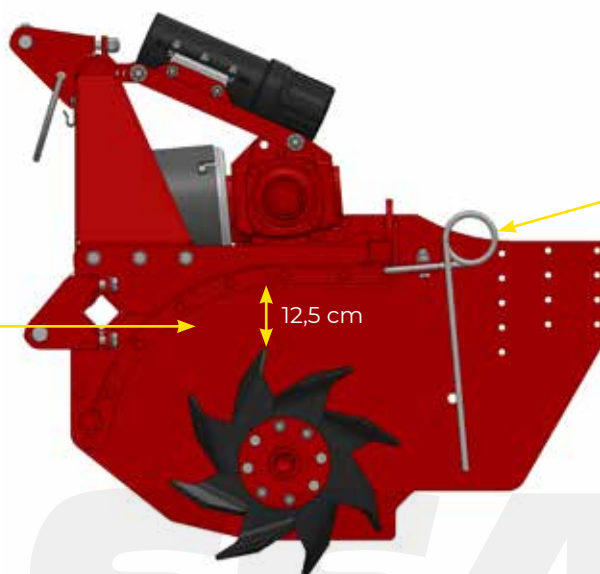

The Selection grill with independent springs allows operation even on moist soil, effectively separating coarse material from fine tilled soil: stones are buried while the refined soil remains on the surface, creating an optimal seedbed.

STANDARD EQUIPMENT:

- ▶ Universal 3-point linkage cat. 1
- ▶ Adjustable front bar connections cat. 1
- ▶ Single-sheet frame made of high-strength steel
- ▶ Single-speed central gearbox PTO 540 rpm
- ▶ Single side transmission by chain ASA 80 HE
- ▶ Rotor bearing housing with double sealing
- ▶ Rotor Ø 390 mm with S700 steel flanges
- ▶ Rotor speed 240 rpm ▶ Rotostone blades (flat 80x8)
- ▶ No. 4 blades per flange, ROTOSTONE type
- ▶ Double flange kit
- ▶ Selection grill with independent springs
- ▶ Levelling bar kit with hand crank adjustment
- ▶ Expanded metal rear roller Ø 290 mm with internal spiral
- ▶ Cardan drive shaft with safety bolt 1" 3/8 Z6
- ▶ Safety devices according to EU regulations

OPTIONAL EQUIPMENT:

- ▶ Cardan drive shaft with automatic clutch
- ▶ Pair of side discs
- ▶ Expanded metal rear roller Ø 360 mm
- ▶ Smooth rear roller Ø 323 mm
- ▶ Packer rear roller Ø 360 mm

SPECIAL EQUIPMENT:

- ▶ Blades with wear-resistant coating
- ▶ Rollers on request
- ▶ Mechanical grass seeder kit
- ▶ Tractor-side yoke options
- ▶ Custom paint colour.

TECHNICAL SPECIFICATIONS

Model		RSH 90	RSH 110	RSH 130	RSH 150
Tractor power	min/max Hp	25-40	25-40	30-40	35-40
Stone burier working width	cm	90	110	130	150
Roller working width	cm	115	135	155	175
Overall transport width	cm	127	147	167	187
Rotostone flanges	Nr.	5	6	7	8
Rotostone blades total	Nr.	20	24	28	32
Base weight	Kg	300	330	350	375

Base configuration: Rotostone 4 blades + Levelling bar + Expanded metal roller Ø 290 mm – Without side discs

* Weight of side discs: 20 kg

The data refer to the machine without optional equipment. Weights and dimensions shown in the tables are indicative and not binding.

